

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.G2349

First Named Inventor or Application Identifier

YOICHI TAKARAGI

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b)

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein

6. ☐ Microfilm Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

Country

State

Telephone

Zip Code

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	29-20 =	9	X \$ 18.00 =	\$162.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	5-3 =	2	X \$ 78.00 =	\$156.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$
				BASIC FEE (37 CFR 1.16(a))	\$760.00
			Total of above Calculations =		\$1,078.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				-
	TOTAL =				\$1,078.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$1,078.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	JACK M. ARNOLD
SIGNATURE	<i>Jack M. Arnold Reg #25,823</i>
DATE	January 28, 1999

TITLE OF THE INVENTION

APPARATUS AND METHOD FOR PROCESSING IMAGE AND
COMPUTER-READABLE STORAGE MEDIUM

5

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an image processing apparatus, an image processing method and a computer-readable recording medium.

Description of the Related Art

Recently, with the improvement of the performance of color copying machines and color printers, a technique for adding information to an image printed by a copying machine for the purpose of preventing unauthorized use of the copying machine has been put to practical use. Information added by the technique comprises, for example, a serial number of a copying machine.

A technique for marking an image with electronic watermark information, which is information about the copyright on the image or restriction of use of the image, has also been made public.

Methods for obtaining electronic watermark information will be explained.

25

As a method of converting a particular information such as a copyright code into electronic watermark information not easily recognizable with eye and superposing on an image the electronic watermark information, a method of mixing, for example, thin-yellow dots in an image according to such a particular information has been proposed. If a printer using binary dot formation instead of forming light and shade dots is used, a method of shifting a yellow dot by an odd or even dot pitch according to "1" or "0" of particular information may be used. A method of frequency-modulating image data according to particular information has also been proposed.

These methods are disclosed in Japanese Patent Laid-Open Publication 5-301380/1993, Japanese Patent Laid-Open Publication 6-86049/1994 and other documents.

Image data containing information such as a copyright code previously set as electronic watermark information may be printed by using a color printer. In such a case, according to the conventional art, information from which a copying machine serial number or the like can be ascertained is automatically added to the printed image. The electronic watermark information added to the original image is thereby disturbed. No means has been provided by considering this problem to ensure that information such as a copyright code will always be added in a discriminable form to printed

matter.

This problem is encountered regardless of the kind of added information although only a copyright code and a machine serial number are mentioned above as added information.

SUMMARY OF THE INVENTION

An object of the present invention to provide an image processing apparatus, an image processing method and a computer-readable medium designed to solve the above-described problem.

Another object of the present invention to provide an image processing apparatus, an image processing method and a computer-readable medium designed to enable a process in which, when image data containing electronic water mark information is printed by a printer having a function of adding a machine serial number, the electronic watermark information can be printed in a recognizable condition.

To achieve these objects, according to one aspect of the present invention, there is provided an image processing apparatus comprising hiding means for forming second identification information not easily recognizable with eye and different in form from first identification information relating to a copyright and not easily recognizable with eye, the hiding means also for setting the second identification

information in image data containing the first identification information.

According to another aspect of the present invention, there is provided an image processing method comprising a setting step including forming second identification information not easily recognizable with eye and different in form from first identification information relating to a copyright and not easily recognizable with eye, setting the second identification information in image data containing the first identification information.

Still another object of the present invention is to provide an image processing apparatus and method in which, in image data containing an item of information set so as not to be easily recognizable with eye, another item of information is set so to be easily readable afterward and so as not to be easily recognizable with eye.

A further object of the present invention is to provide a novel method, apparatus and computer-readable storage medium for setting information in image data so that the information is not easily recognizable with eye when the image of the image data is formed.

These and other objects, features and advantages of the present invention will become apparent from the following detailed description of the preferred embodiments of the present invention in conjunction with the accompanying

drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the configuration of an image scanner unit and a printer unit of a first embodiment of the present invention;

Fig. 2 is a diagram showing the construction of a copying machine which represents the first embodiment of the invention;

Fig. 3 is a diagram showing the relationship between three primary colors of light and three primary colors of a coloring material;

Fig. 4 is a block diagram of signal processing sections for adding information to input R, G, and B signals and for adding information to an output Y, M, C, and K signals;

Fig. 5 is a block diagram showing the configuration of a machine number addition circuit in the first embodiment;

Fig. 6 is a block diagram showing the configuration of a copyright code addition circuit in the first embodiment;

Fig. 7 is a diagram showing an example of copying in the first embodiment;

Fig. 8 is a block diagram showing the configuration of an image scanner unit and a printer unit of a second embodiment of the present invention;

Fig. 9 is a block diagram showing the configuration of a copyright code addition circuit in the second embodiment;

Fig. 10 is a timing chart of signals CLK2 and Hsync2 formed by thinning-out circuits;

Fig. 11 is a diagram showing an example of copying in the second embodiment;

Fig. 12 is a block diagram showing the configuration of a computer and a printer unit of a third embodiment of the present invention; and

Fig. 13 is a block diagram for explaining processing for marking an image with electronic watermark information by using frequency conversion in the third embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will be described below with reference to the accompanying drawings.

An example of a copying machine to which the present invention is applied will be described, but the present invention is not limited to it and can, of course, be applied to other various apparatuses.

Fig. 1 is a block diagram showing an image scanner unit 201 and a printer unit 202 of a copying machine which represents a first embodiment of the present invention.

Referring to Fig. 1, charge-coupled device (CCD) line sensors 210R, 210G, and 210B are provided, which have the

same length as one side of a rectangular original table,
which have photosensitivity characteristics of red (R),
green (G), and blue (B), respectively, and each of which
outputs 8-bit signals 0 to 255 after analog to digital
conversion. The CCD sensors 210R, 210G, and 210B used in
this embodiment are disposed by being spaced apart from each
other by a certain distance. Therefore, spatial errors
between signals from the CCD sensors 210R, 210G, and 210B
are corrected by delay circuit 401R, 401G, and 401B having
different delay times according to the distance.

A copyright code addition circuit 402 adds a copyright
code as a first identification signal to an R signal from
the CCD sensor 210R. The copyright code is added as
electronic watermark information not easily recognizable
with eye. Each of logarithmic converters 403, 404, and 405
is formed of a lookup table read-only memory (ROM) or random
access memory (RAM), and converts a luminance signal into a
density signal. A masking and under-color removal (UCR)
circuit 406, not described in detail below, is arranged in a
well-known manner to convert three input signals into
magenta (M), cyan (C), yellow (Y), and black (Bk) signals.
When an original is read one time, the masking and UCR
circuit 406 outputs the signals in a surface-sequential
manner by a predetermined bit length of, for example, eight
bits.

A central processing unit (CPU) 450 outputs a CNO signal which is a 2-bit surface-sequential signal for controlling the order of four transfer operations, as shown below, by changing operating conditions of the masking and UCR circuit 406.

CNO signal	Print Output
0	M
1	C
2	Y
3	Bk

A spatial filter circuit 407 is arranged in a well-known manner to correct the spatial frequencies of the output signals. A density conversion circuit 408 corrects temperature characteristics of the printer unit 202. The density conversion circuit 408 is formed of a ROM or RAM similar to that of the logarithmic converters 403 to 405.

A machine number addition circuit 410 enables addition of a second identification signal to the copy output. The second identification signal is, for example, a machine number such as a serial number of the printer, and forms electronic watermark information in thin yellow on a recording medium in this embodiment. The electronic watermark information in the printed state is not easily recognizable with eye. In a case where the copying machine in a multicolor mode is put to a bad use, e.g., to copy a

particular image such as an image of a bank note, the machine can be identified from this electronic watermark information.

The CPU 450 controls the image signal processing and scanning operation of the image scanner unit 201. A read-only memory (ROM) 451 stores a program for the CPU 450. A random access memory (RAM) 452 is used as a work area by the CPU 450. A CPU 460 controls the image signal processing and printing operation of the printer 202. A ROM 461 stores a program for the CPU 460. A RAM 462 is used as a work area by the CPU 460. The ROM 461 forms a computer readable recording medium in this embodiment. A semiconductor memory, an optical disc, an magneto-optical disc, a magnetic medium, or the like is used as ROM 461.

Fig. 2 schematically shows the construction of the copying machine. The image scanner unit 201 reads an original and processes a read signal in a digital signal processing manner. The printer unit 202 prints on a sheet of paper a multicolor image corresponding to the original image read by the image scanner unit 201.

In the image scanner unit 201, a mirror-surface pressure plate 200 presses an original 204 placed on an original support glass (hereinafter referred to as "platen") 203. Original 204 is irradiated with light from a lamp 205, and reflected light from original 204 is led by mirrors 206,

207, and 208 to be imaged on the three CCDs 210 by a lens
209. Signals obtained as multicolor information red (R),
green (G), and blue (B) components from the CCDs 210 are
supplied to a signal processing section 211. The lamp 205
5 and the mirror 206 are mechanically moved at a speed v in a
direction perpendicular to the electrical scanning (main
scanning) direction of the CCDs, and the mirrors 207 and 208
are moved at a speed of $1/2v$ in the same direction, thereby
scanning the entire original surface (subscanning) and
10 sending the signals to the signal processing section 211.
The scanning in the subscanning direction is started in
synchronization with a signal VSYNC described below and is
performed based on a signal HSYNC (a sync signal output in
one main scanning cycle) while the electrical scanning is
15 started in synchronization with the HSYNC and is performed
based on a signal CLK.

In the signal processing section 211, the read signals
are temporarily stored in an image memory and thereafter
electrically processed to be decomposed into magenta (M),
20 cyan (C), yellow (Y), and black (Bk) components, which are
sent to the printer unit 202. To read out image data read
and stored by completing the process of scanning the
original one time, reading is performed four times. One of
the M, C, Y, and Bk components is formed and sent to the
25 printer unit 202 by image processing following each cycle of

reading. One printout is completed by performing reading
and processing four times. Each of the image signals M, C,
Y, and Bk sent from the image scanner unit 201 is supplied
to a laser driver 212. The laser driver 212 drives a
semiconductor laser device 213 by modulating the intensity
or the lighting time of a drive signal with the density of
the supplied image signal. A surface of a photosensitive
drum 217 is scanned with laser light from the laser device
213, which is led to the photosensitive drum 217 by a
polygon mirror 214, an f- θ lens 215, and a mirror 216.

A rotary development device 218 is constituted of a
magenta development section 219, a cyan development section
220, a yellow development section 221, and a black
development section 222. The four development sections are
brought into contact with the photosensitive drum 217 one
after another to develop, with toners, an electrostatic
image formed on the photosensitive drum. A sheet of
printing paper supplied from a paper cassette 224 or 225 is
wrapped around a transfer drum 223, and the image developed
on the photosensitive drum is transferred onto the printing
paper.

After four colors M, C, Y, and Bk have been
successively transferred in this manner, the printing paper
is fed through a fixation unit 226 for fixation of the
toners and is then expelled.

Three primary colors of light and three primary colors of coloring materials will now be described.

Fig. 3 shows the relationship between three primary colors of light and three primary colors of coloring materials.

Colors seen on a personal computer display or the like are produced by combining primary colors red, green and blue of light. A mixture of equal intensities of all these primary colors of light produces sensation of white. Multicolor printers express a color not by the three primary colors of light but by the same primary colors as those of oil or water colors or the like. The three primary colors of coloring materials are cyan, magenta and yellow and mixing equal amounts of these colors produces black. The three primary colors of light and the three primary colors of coloring materials are complementary with each other.

The input B signal relates mainly to the Y signal. If the B signal contains electronic watermark information such as a copyright code, and if the machine number is added to a color print by modulating the Y signal, the electronic watermark information added to the B signal and converted into a Y signal component is disturbed. In the case where, as shown in Figs. 1 and 4, the copyright code addition circuit 402 adds electronic watermark information such as a copyright code to one of the color component signals, e.g.,

the R signal different from the color signal to which a machine number is added, the C signal mainly reflects the electronic watermark information, as can be understood from Fig. 3. On the printer 202 side, therefore, after conversion of the R, G, and B signals into Y, M, C, and Bk signals, the machine number is added by modulating the Y signal, so that the influence of addition of this information is small. The copyright code and the machine number marked on the resulting print can easily be discriminated from each other since they have different color tones.

Fig. 5 is a block diagram showing the configuration of the machine number addition circuit 410. The machine number addition circuit 410 has a subscanning counter 901 and a main scanning counter 902. The subscanning counter 901 counts the above-mentioned HSYNC and has its count cleared in synchronization with the above-mentioned VSYNC. The main scanning counter 902 counts the pixel sync signal CLK and has its count cleared in synchronization with the HSYNC. The machine number addition circuit 410 also has a look-up table ROM (hereinafter referred to as "LUT") 903, an AND gate 904, a flip-flop 905, an AND gate 913, a register 906, an AND gate 911, and an adder 912.

The operation of this embodiment will now be described.

The subscanning counter 901 counts the main scanning

sync signal HSYNC by a 9-bit length, and the main scanning counter 902 also counts the pixel sync signal CLK by a 9-bit length. Each of the subscanning counter 901 and the main scanning counter 902 counts in a cycle of 512. In other words, outputting values "1 to 511" from each counter is repeated. The LUT 903 is a read-only memory in which a pattern to be added (machine number) is stored. To the LUT 903, the lower six bits of the count value of each of the subscanning counter 901 and the main scanning counter 902 are input at a time as an input address. Only one bit output from the LUT 903 is referred to and the logical product of this bit and the upper three bits from each of the subscanning counter 901 and the main scanning counter 902 is obtained by the AND gate 904. This logical product is synchronized with the image signal V by the flip-flop 905 based on the CLK signal, and is logically combined with each of the two values "0" and "1" of the two-bit surface-sequential signal CNO by the AND gate 913. The output from the AND gate 913 is supplied to the AND gate 911. This signal is effective when CNO = 2, that is, only when printing is performed in yellow.

A value P1, which designates the density of the image to be added, is previously held in the register 906. The logical product of the value P1 and the data from the AND gate 913 is obtained by the AND gate 911 and is added to the

input signal V by the adder 912 to add the pattern held in the LUT 903. The addition result V' is output from the adder 912. Consequently, when CNO = 2, i.e., when printing is performed in yellow, the pattern held in the LUT 903 is repeatedly read out and added to the signal V to be output. The additional pattern is added by using only a yellow toner to be difficult to recognize with human eye. This is a result of consideration of the fact that the discriminating power of the eye is weak with respect to a pattern depicted in a yellow toner.

Fig. 6 is a block diagram showing the configuration of an example of the copyright code addition circuit 402.

The configuration shown in Fig. 6 is generally the same as that shown in Fig. 5. However, a LUT 910 shown in Fig. 6 is a RAM to which data can be written from the CPU 450, and copyright codes are stored in the LUT 910. With respect to the copyright codes, control using the surface-sequential signal CNO is not performed.

The copyright code addition circuit 402 has adders 502 and 504, and registers 501 and 503 in which data is set by the CPU 450. The pattern addition position can be changed by setting suitable values in these registers such that the existence of the pattern is unnoticeable. That is, the position in the subscanning direction in which the copyright code is set can be changed by selecting the value set in the

register 501, and the position in the main scanning direction can be changed by selecting the value set in the register 503. Setting of the values in the registers 501 and 503 is controlled so that the copyright code is added in a position different from the position at which the machine number will be added.

Fig. 7 illustrates a result of the copying process of this embodiment. Letters indicated by 1001 in Fig. 7 represent an added machine number pattern corresponding to the content of the LUT 903. Letters indicated by 1002 represent an added copyright code. In the example shown in Fig. 7, the pattern 1001 in which letters "ABCD" and "1234" are arranged in the subscanning direction is added as a pattern formed of 64×64 pixels such as to be difficult to discriminate with the human eye. The pattern 1001 is repeatedly added with a pitch of 512 pixels in the main scanning direction and with a pitch of 512 pixels in the subscanning direction. If a serial number or coded data of a serial number exclusively assigned to the copying machine is added as pattern 1001, the copying machine can be identified by examining the copy to which the pattern 1001 is added.

If the resolution is 400 dot/inch, the pitch with which the pattern 1001 is added and which corresponds to 512 pixels in the main scanning direction in this embodiment is

about 32.5 mm. The length of the shorter side of the bank notes issued by the Bank of Japan is about 76 mm, and the bank notes of other major countries also have shorter-side lengths between about 60 to 120 mm. Therefore, if any of these bank notes is copied, the pattern 1001 can always be added within the area of the copy of the bank note. Even if only the bank note portion of the copy is cut out and used for an evil purpose, the machine number of the copying machine used to copy the bank note can be identified by examining the copy and reading the added pattern 1001.

A second embodiment of the present invention will next be described.

The first embodiment has been described with respect to an image processing system in which image data is transferred from an electronic apparatus to an image forming apparatus, and in which a color signal component for adding identification information by the image forming apparatus is made different from a color component for adding electronic watermark information such as a copyright code by the electronic apparatus.

In the second embodiment, the size of the block form of identification information added by an image forming apparatus and the size of the block form of identification information such as a copyright code added by an electronic apparatus are made different from each other to facilitate

discrimination and recognition of each information.

Figs. 8 to 11 illustrate the second embodiment.

Referring to Fig. 8, a copyright code addition circuit 430 is arranged to add a copyright code to the B signal. In this embodiment, the B signal is in a complementary relationship with the Y signal. A copyright code is added so as to form a yellow pattern in a print.

Fig. 9 is a block diagram showing the configuration of the copyright code addition circuit 430. In Fig. 9, components corresponding to those shown in Figs. 6 and 6 are indicated by the same reference characters.

Thinning-out circuits 505 and 506 reduce the frequencies of signals Hsync and CLK to, for example, $1/2$ to obtain Hsync2 and CLK2, respectively, as shown in Fig. 10, thereby doubling the block size of the copyright code 1002 added by the electronic apparatus relative to the block size of the machine number 1001 added by the image forming apparatus in the main scanning direction and in the subscanning direction.

In this embodiment, even if the image forming apparatus and the electronic apparatus which transfers image data to the image forming apparatus respectively add two items of identification information as the same color component, the block forms of the additional information items are made different in size from each other so that the two

information items can be identified by being discriminated from each other. Needless to say, the identification information added by the image forming apparatus and the identification information added by the electronic apparatus may be added as different color components while their block forms are different in size from each other

Fig. 12 is a block diagram showing a third embodiment of the present invention.

While each of the systems of the first and second embodiments is arranged to transfer image data from an image scanner to a printer, the system of the third embodiment is arranged to transfer image data from a computer to a printer.

Referring to Fig. 12, a unit 800 receives image data from a computer 810 and transfers the received data to a printer unit 202. A CPU 801 performs processing for marking an image with an electronic watermark information such as a machine number by controlling an image memory control circuit 803, and controls image transfer between the computer 800 and the printer unit 202. A ROM 802 stores a program for the CPU 801. The printer unit 202 has the same configuration as that shown in Fig. 1 or 8.

In the above-described embodiments, various information items are added. A modification of the process of adding information will now be described.

Fig. 13 is a block diagram of a processing section for

marking an image with electronic watermark information such as those in the described embodiments.

First, image data is converted into frequency components by a discrete cosine transform (DCT) section 1101.

5 Next, watermark information of a machine number is set as a frequency component by an adder 1102. In this case, the watermark information is set at the boundary between a sensible region and an insensible region in the human perception. The frequency components with the set watermark information are then inversely transformed to restore the image data.

10 Thus, identification information is set by a method different from the method of using the identification information addition means on the printer 202 side, thereby facilitating discrimination between a machine number added by the printer unit 202 and a machine number added by the electronic apparatus which transmits data to the printer unit 202.

15 In the embodiments of the present invention, the electronic apparatus or the like may have a function for ascertaining whether the printer unit 202 has a function for adding identification information when the electronic apparatus transfers image data to the printer unit 202. If the printer unit 202 has no function for adding
20 identification information, the electronic apparatus adds
25

identification information. The embodiments have been described with respect to the case where a printer is used as an example of the image forming apparatus. However, any other image forming apparatus, e.g., a display may be used instead of the printer.

In the above described embodiments, a copyright code is produced by each of the copyright code circuits 402 and 430 shown in Figs. 1 and 8. Such identification information for identification of a person who made an image may be input manually or by inserting a magnetic card or the like. In the case of the system shown in Fig. 12, a copyright code is produced by being input from the computer 810.

The method of adding identification information according to the present invention is not limited to those in the above-described embodiments, and other various addition methods are possible. Essentially, any method may suffice as long as electronic watermark information can be added in a discriminable state.

As described above, in the embodiments of the present invention, the system in which an item of identification information not easily recognizable with eye when displayed as electronic watermark information or the like is added to image data containing similar identification information is designed so that the two information items can easily be discriminated from each other. For example, when image data

containing electronic watermark information such as a
copyright code is printed by a printer having a function for
adding a machine number, the two items of watermark
information can be printed in a state of being discriminable
from each other.

Such two identification information items may be
obtained in a state of being different in color and/or block
size such as to be easily discriminable from each other.

Even if two identification information items have the
same color, they can be discriminated from each other. Even
if an original image is printed by being marked with
identification information, the visibility of identification
information is low enough to impair the quality of the
original image.

While the present invention has been described with
respect to what presently are considered to be the preferred
embodiments, it is to be understood that the invention is
not limited to the described embodiment. To the contrary,
the present invention is intended to cover various
modifications and equivalent arrangements included within
the spirit and the scope of the appended claims. The scope
of the following claims is to be accorded the broadest
interpretation so as to encompass all such modifications and
equivalent structures and functions.

WHAT IS CLAIMED IS:

1. An image processing apparatus comprising hiding means for forming second identification information not easily recognizable with eye and different in form from first identification information relating to a copyright and not easily recognizable with eye, said hiding means also for setting the second identification information in image data containing the first identification information.

2. An image processing apparatus according to Claim 1, wherein the first identification information is formed by a first color signal, and said hiding means comprises color conversion means for performing color conversion of the image data, and forming means for forming the second identification information by a second color signal different from the first color signal forming the color-converted first identification information in the color-converted image data.

3. An image processing apparatus according to Claim 1, wherein the first identification information has a first block size, and said hiding means forms the second identification information having a second block size.

4. An image processing apparatus according to Claim 3, wherein said hiding means comprises color conversion means for performing color conversion of the image data, and sets the second identification information having the second block size in the color-converted image data.

5. An image processing apparatus according to Claim 4, wherein each of the color-converted first identification information and the second identification information is formed by a yellow signal.

6. An image processing apparatus according to Claim 1, wherein the first identification information is formed by a signal for a thin color.

7. An image processing apparatus according to Claim 1, wherein the first identification information is set as a frequency component of the image data.

8. An image processing method comprising a setting step including:

forming second identification information not easily recognizable with eye and different in form from first identification information relating to a copyright and not easily recognizable with eye; and

setting the second identification information in image data containing the first identification information.

9. An image processing method according to Claim 8, wherein the first identification information is formed by a first color signal, and said setting step comprises performing color conversion of the image data and forming the second identification information by a second color signal different from the first color signal forming the color-converted first identification information in the color-converted image data.

10. An image processing method according to Claim 8, wherein the first identification information has a first block size, and said setting step comprises forming the second identification information having a second block size.

11. An image processing method according to Claim 10, wherein said setting step comprises performing color conversion of the image data and setting the second identification information having the second block size in the color-converted image data.

12. An image processing method according to Claim 11, wherein each of the color-converted first identification

information and the second identification information is formed by a yellow signal.

13. An image processing method according to Claim 8, wherein the first identification information is formed by a signal for a thin color.

14. An image processing method according to Claim 8, wherein the first identification information is set as a frequency component of the image data.

15. A computer-readable storage medium comprising a program for a setting process stored therein, the setting process including:

forming second identification information not easily recognizable with eye and different in form from first identification information relating to a copyright and not easily recognizable with eye; and

setting the second identification information in image data containing the first identification information.

16. A computer-readable storage medium according to Claim 15, wherein the first identification information is formed by a first color signal, and the setting process comprises color conversion processing for performing color

conversion of the image data and forming processing for forming the second identification information by a second color signal different from the first color signal forming the color-converted first identification information in the color-converted image data.

17. A computer-readable storage medium according to Claim 15, wherein the first identification information has a first block size, and the setting process comprises forming the second identification information having a second block size.

18. A computer-readable storage medium according to Claim 17, wherein the setting process comprises color conversion processing for performing color conversion of the image data, and sets the second identification information having the second block size in the color-converted image data.

19. An image processing apparatus comprising hiding means for forming second identification information not easily recognizable with eye and different in form from first identification information not easily recognizable with eye, said hiding means also for setting the second identification information in image data containing the

first identification information.

20. An image processing apparatus according to Claim 19, wherein the first identification information is formed by a first color signal, and said hiding means comprises color conversion means for performing color conversion of the image data, and forming means for forming the second identification information by a second color signal different from the first color signal forming the color-converted first identification information in the color-converted image data.

21. An image processing apparatus according to Claim 19, wherein the first identification information has a first block size, and said hiding means forms the second identification information having a second block size.

22. An image processing apparatus according to Claim 21, wherein said hiding means comprises color conversion means for performing color conversion of the image data, and sets the second identification information having the second block size in the color-converted image data.

23. An image processing apparatus according to Claim 22, wherein each of the color-converted first identification

information and the second identification information is formed by a yellow signal.

24. An image processing apparatus according to Claim 19, wherein the first identification information is formed by a signal for a thin color.

25. An image processing apparatus according to Claim 19, wherein the first identification information is set as a frequency component of the image data.

26. A computer-readable storage medium comprising a program for a setting process stored therein, the setting process including:

forming second identification information not easily recognizable with eye and different in form from first identification information and not easily recognizable with eye; and

setting the second identification information in image data containing the first identification information.

27. A computer-readable storage medium according to Claim 26, wherein the first identification information is formed by a first color signal, and the setting process comprises color conversion processing for performing color

conversion of the image data and forming processing for forming the second identification information by a second color signal different from the first color signal forming the color-converted first identification information in the color-converted image data.


28. A computer-readable storage medium according to Claim 26, wherein the first identification information has a first block size, and the setting process comprises forming the second identification information having a second block size.

29. A computer-readable storage medium according to Claim 28, wherein the setting process comprises color conversion processing for performing color conversion of the image data, and sets the second identification information having the second block size in the color-converted image data.

ABSTRACT OF THE DISCLOSURE

An image forming apparatus and method arranged to perform a process in which a copyright code is set as electronic watermark information in red, green, and blue image data obtained by a scanner, the image data is then transferred to a printer to undergo density conversion with respect to yellow, magenta, cyan, and black, and a printer serial number is set as electronic watermark information in the converted image data, followed by printing of the image data. This process facilitates discrimination of the two items of information.

FIG. 1

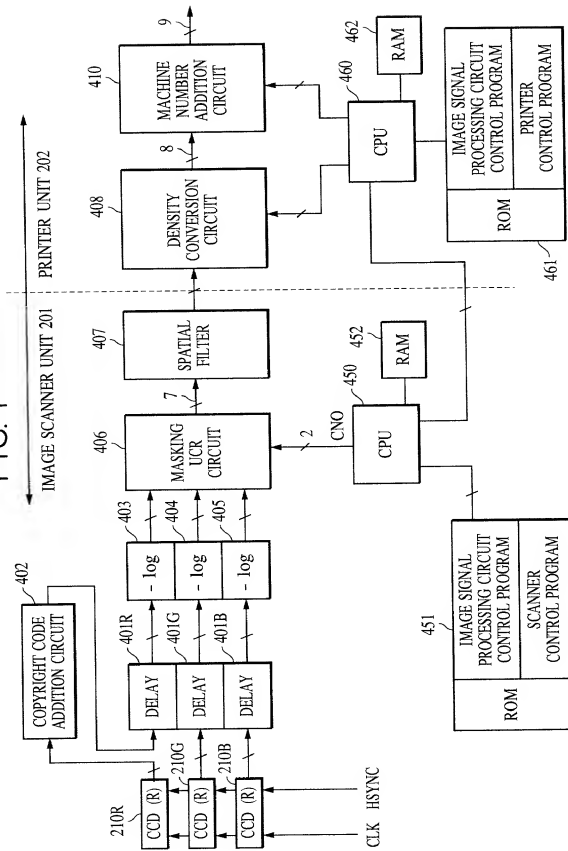

[illegible][illegible]

FIG. 4

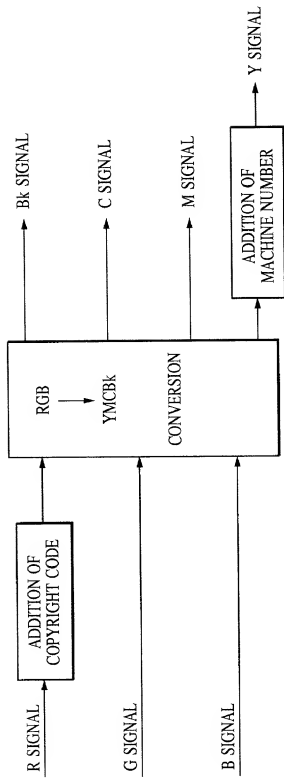


FIG. 5

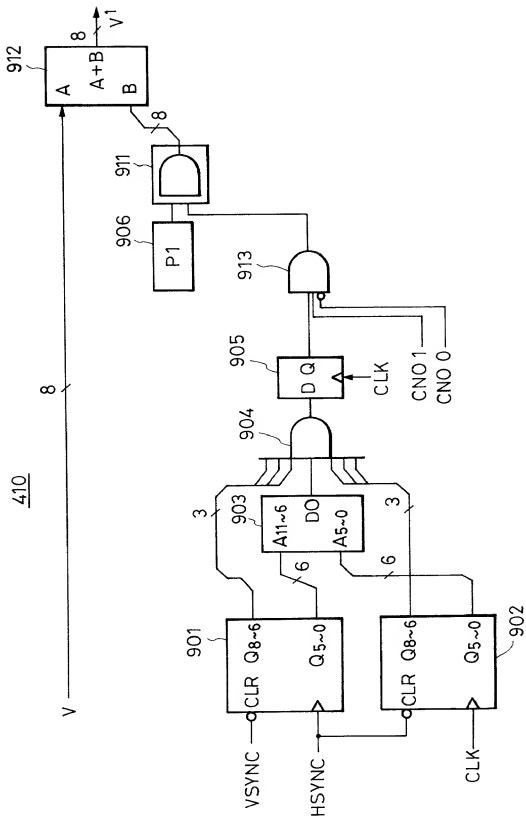


FIG. 6

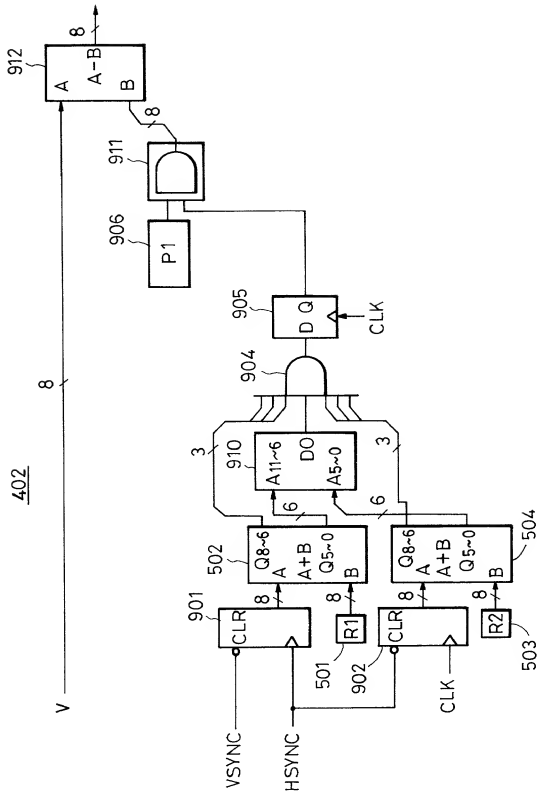


FIG. 7


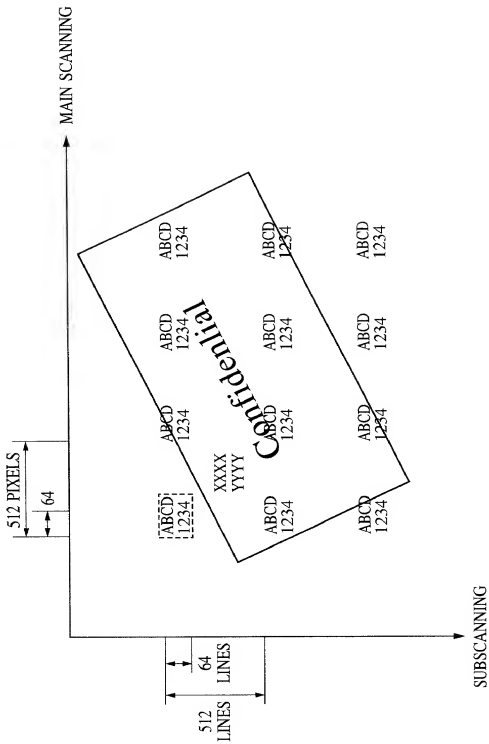


FIG. 8

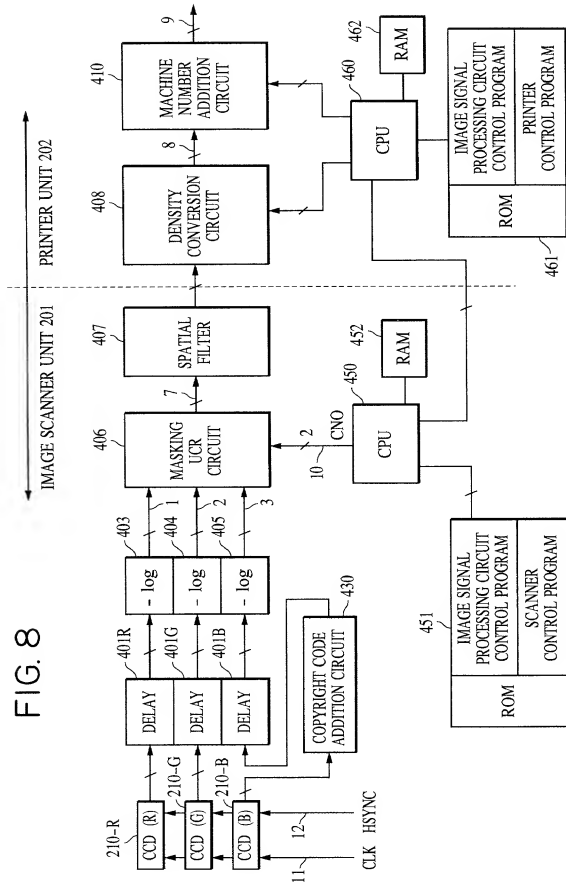

96E

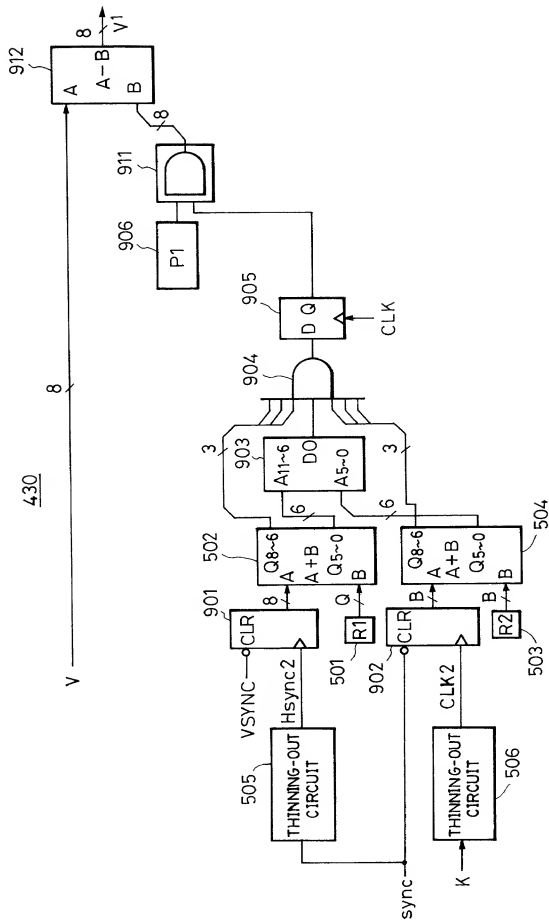


FIG. 10


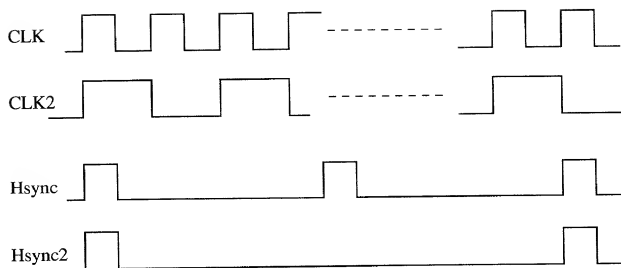


FIG. 11



	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---


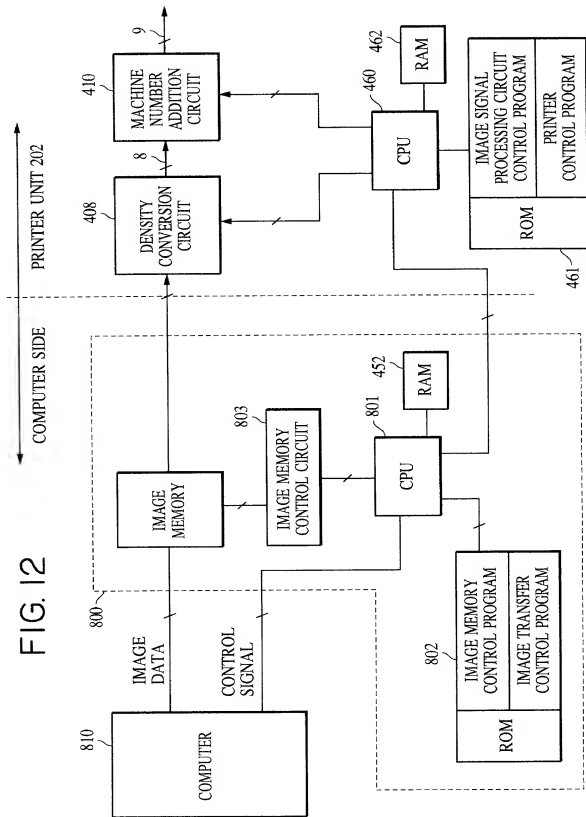


FIG. 13

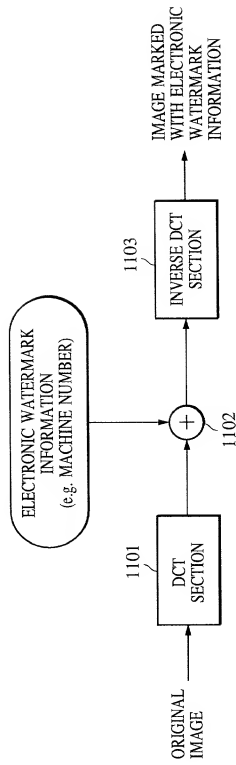

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled APPARATUS AND METHOD FOR PROCESSING IMAGE AND COMPUTER-READABLE STORAGE MEDIUM, the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo/Yr)	(Yes/No) Priority Claimed
Japan	019566	30 January 1998	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

Application No.	Filed (Day/Mo/Yr)	Status (Patented, Pending, Abandoned)
	NONE	

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First Inventor YOICHI TAKARAGI

Inventor's signature _____

Date _____

Citizen/Subject of Japan

Residence 1-24-5-809, Kagahara, Tsuzuki-ku, Yokoyama-shi,
Kanagawa-ken, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko,
Ohta-
ku, Tokyo, Japan